


DURANGO TANK

2 - 22



hey june
PATTERNS

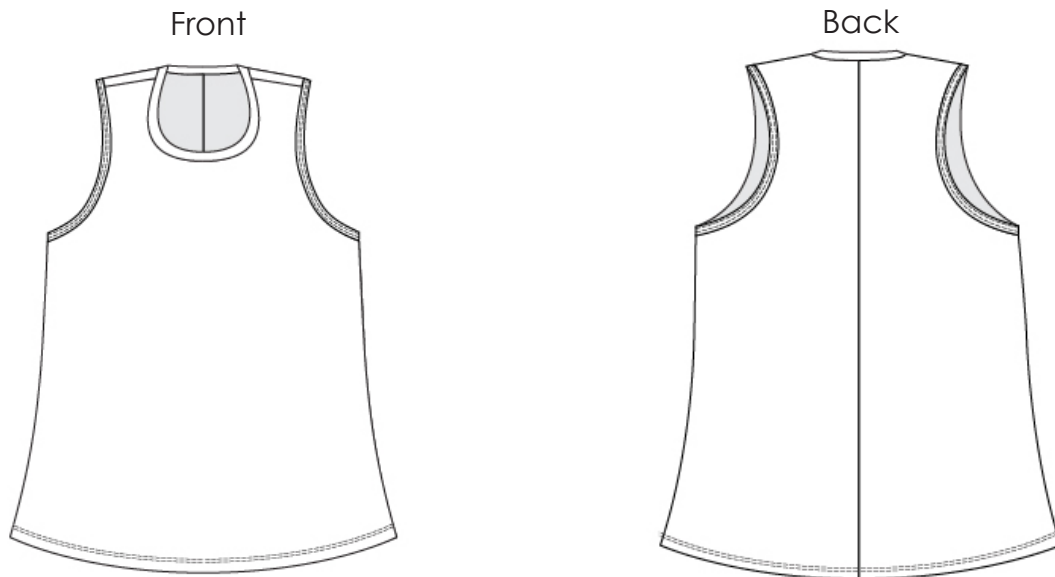

THE DURANGO TANK is a casual sleeveless shirt with a center back seam and longer flared hem. The higher neckline and high-cut shoulders give it a vintage summer concert tee vibe. The Durango is fitted at the shoulder and bust and loose through the waist and hip for an easy fit. The cut of the shoulders is perfect for showing off cute cami or bralette straps, or keep everything under wraps with a racerback bra. Use it as a base for your favorite iron-on decal or screen print, and pair it with a Sandbridge Skirt and flip flops for the perfect summer outfit!

FABRIC REQUIREMENTS: Sizes 2 - 14: 1.25 yards of 55" or wider knit fabric. Sizes 16 - 22: 2 yards of 55" or wider knit fabric (above 60" wide will fit on 1.25 yards.) Requires t-shirt knits such as triblend, cotton/poly, cotton jersey, rayon spandex, cotton spandex, bamboo blends, and similar light to mid-weight knits.

SIZING: Pattern is drafted for a B sewing cup and has negative ease at the bust. A FBA may be necessary for larger cup sizes.

body	2	4	6	8	10	12	14	16	18	20	22
high bust	32.5	33.5	34.5	35.5	36.5	37.5	38.5	40	41.5	43	44.5
hip	35	36.4	37.5	38.5	39.5	41	42.5	44.3	46	48	50


finished garment

full bust	31	32	33	34	35	36	37	39	41	43	45
hip	38.5	39.5	40.5	41.5	42.5	43.5	44.5	46.5	48.5	50.5	52.5

Back length is 27" (measured on a size 12)

TERMS OF USE: Purchase includes the right to sell garments made with this pattern. However, it is illegal to copy, share, distribute, or resell the pattern, illustrations, or instructions. Please respect the copyright and direct any requests to www.heyjunehandmade.com. Printers: Please allow your customer to have this pattern printed on a large format printer in your store.


TO PRINT: Open the pattern using Adobe Reader. (If you don't have the program, you can download it free from www.adobe.com/reader. A downloaded version of Adobe Reader tends to help correct any printing issues that can occur with a Microsoft or Mac pdf preview application.) On the left side of your pattern window, you'll see a menu. Choose the layers option, which looks like two or three overlapping diamond shapes, and is usually the last symbol on the menu. Click on the pattern name. Now you can click in the boxes next to each size to turn them on or off. Make sure the eyeball symbol is visible next to your size, "labels", and "cutting layouts". You can turn the other sizes off. Your printed pattern will now only include your size, making it much easier to cut and saving ink. The picture below is an example of only printing size 10.

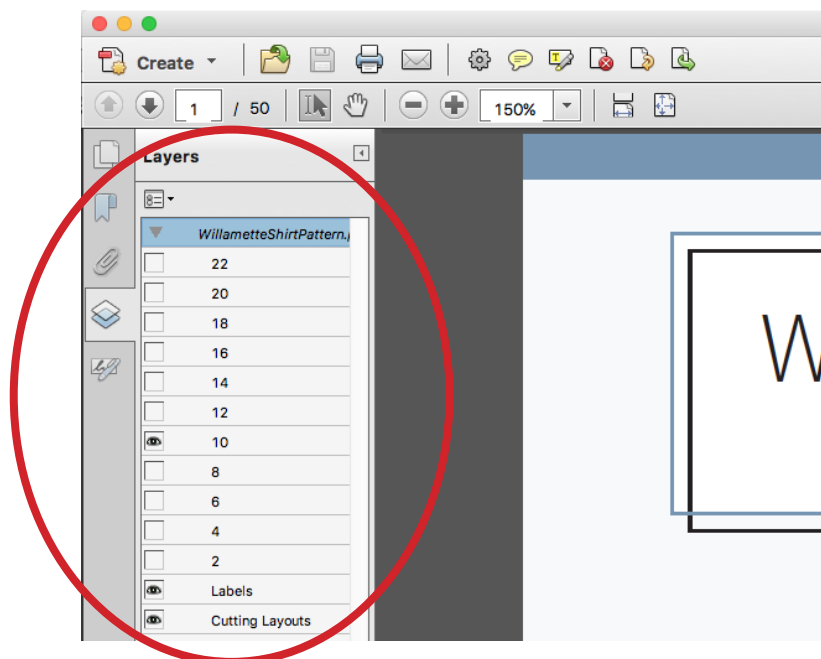


Before printing, be sure that your scaling is set to "no scaling" or "100%". Print page 13 first and measure the test boxes to be sure you're printing to scale. Even a 1/16" discrepancy can throw your whole pattern off.

Print Guide:


All sizes: 13 - 27

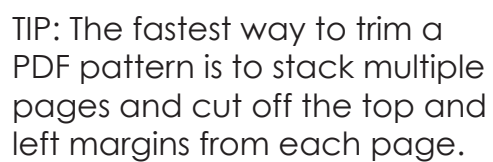

1.25 yards 55" fabric
sizes 2 - 14

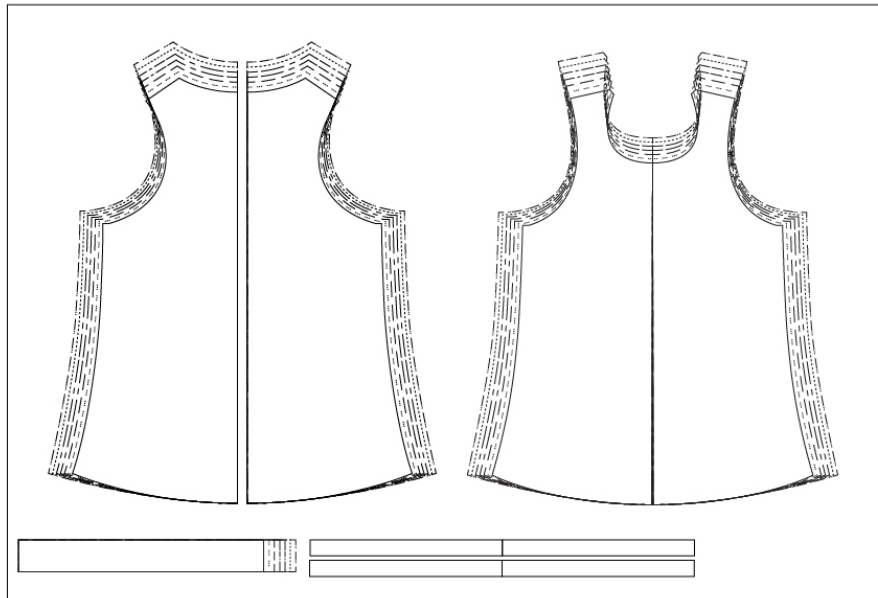


2 yards 55" fabric
sizes 16 - 22

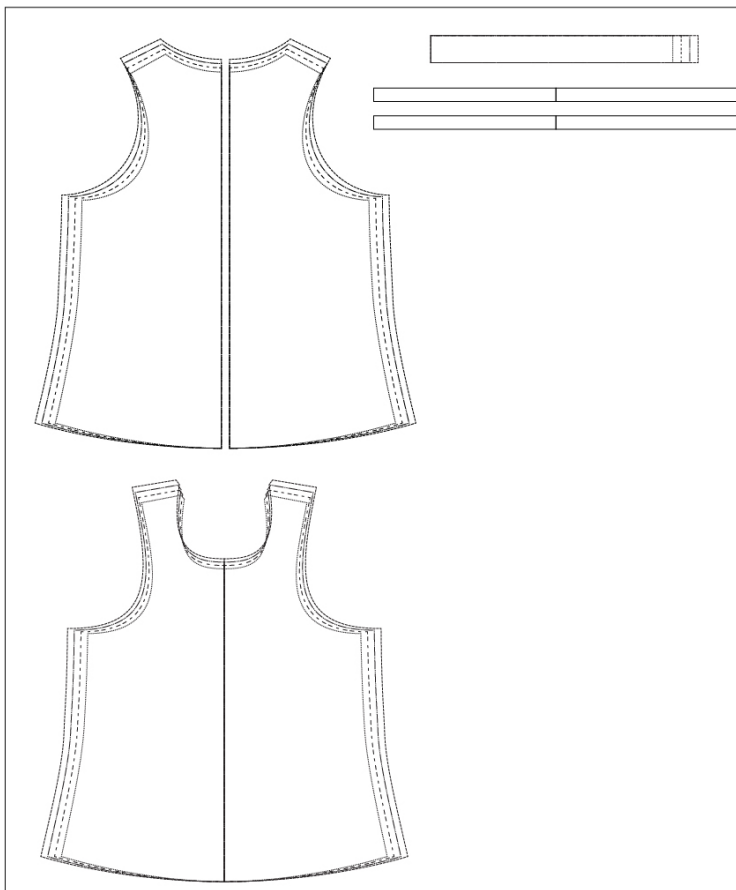


Note: sizes 16 - 22 may also fit on 1.25 yards of fabric depending on the fabric width. Before cutting, lay out the pattern pieces to see if they will fit according to the layout for sizes 2 - 14.

CUTTING INSTRUCTIONS

- Cut one front (1) on fold
- Cut two backs (2) (mirrored pair)
- Cut one neckband (3)
- Cut two arm bindings (4) on fold

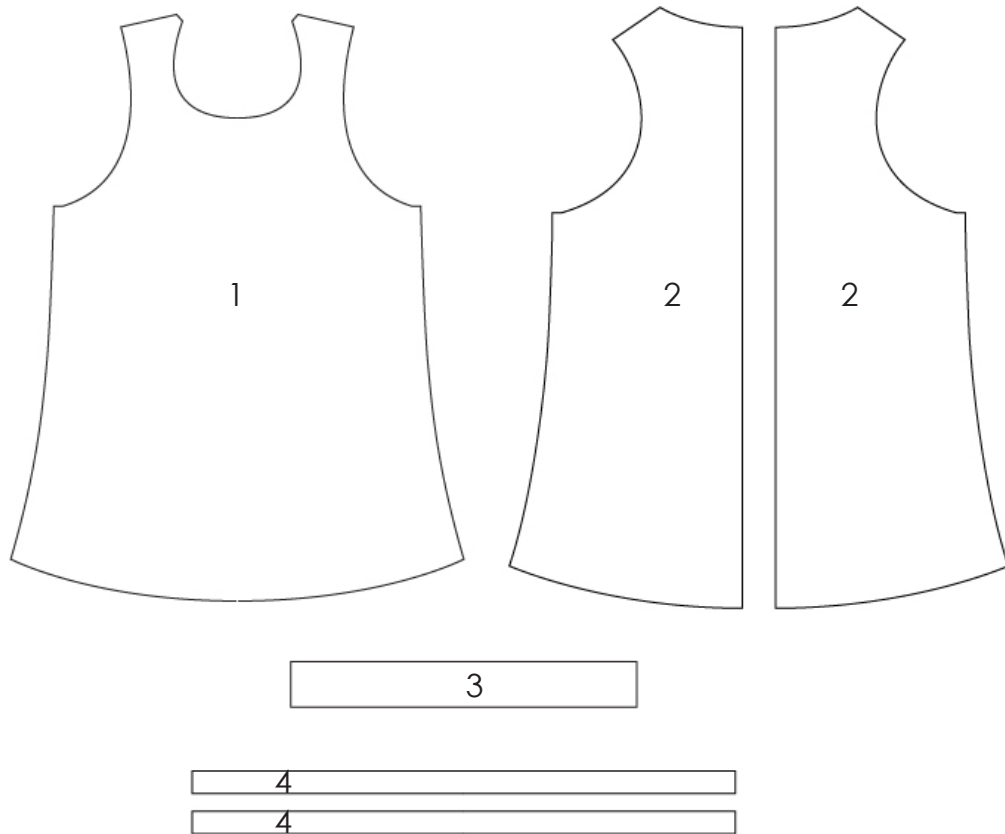


Note: the center seam on the back piece is a great place to add shaping to the pattern to adjust for a swayback or just to make the tank more fitted. Be sure to take out the most width at the natural waist and ease gently back to the center back seam above and below.

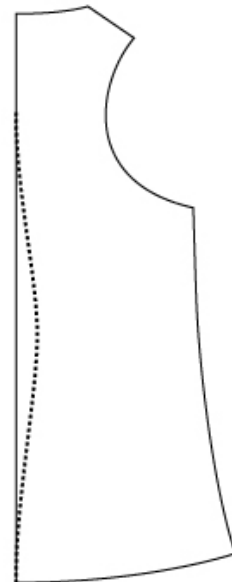




Seam allowances are 3/8" unless otherwise stated.


1. Sew the two back pieces right sides together along the center back. Press seam allowances open or to one side if serging.

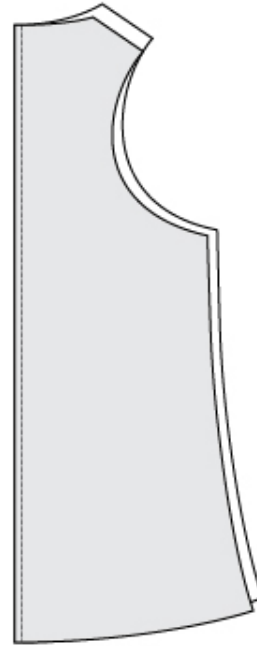


2. Sew the front and back pieces right sides together along the shoulder seams. Press seam allowances open or to the back if serging.

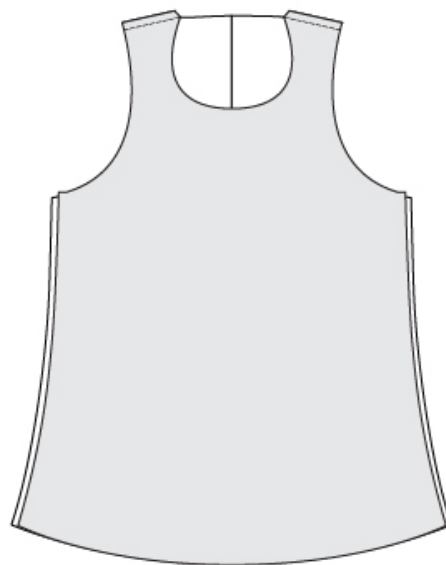


3. Divide the neckline into 4 equal quarters (easily done by folding the pattern in half to find center front, and then aligning center front and center back to find the halfway mark between the two.) The quarter marks on the neckline will be about 1" down from the shoulder seam on the front of the tank. Mark the quarters with a pin or by clipping a small notch.

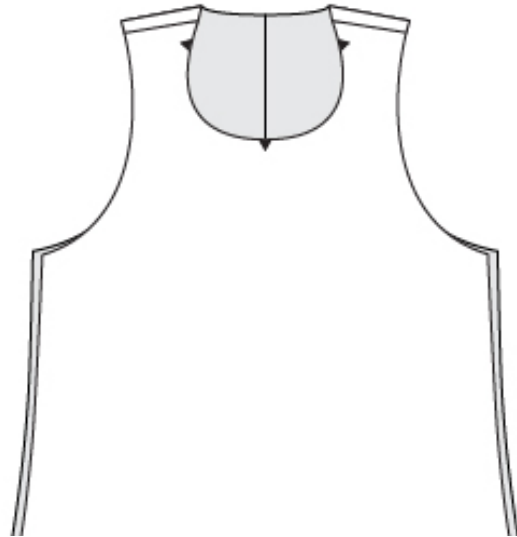

4. Press the neckband wrong sides together lengthwise.

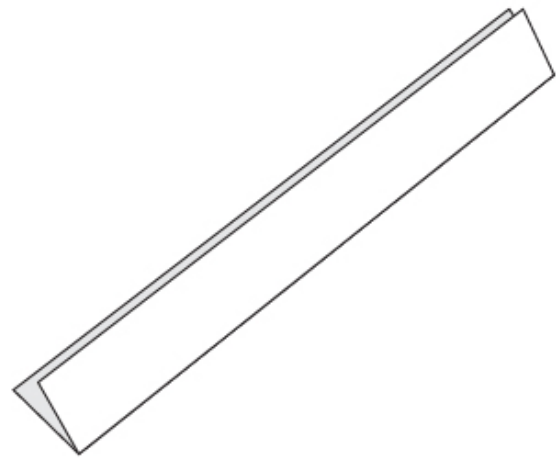


5. Open up the neckband and sew it right sides together along the short ends, forming a loop. Press the seam allowances open or to one side if serging.

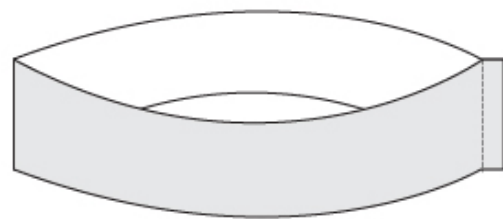


Fold the neckband down on itself, in half, wrong sides together. It should now be half its original height with only right sides of fabric showing on both sides.




6. Find the quarters of the neckband in the same way as the neckline and mark them with a pin.

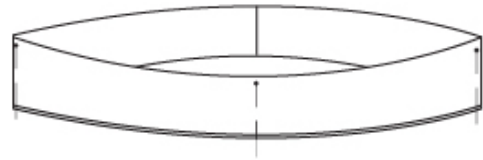


7. Align the quarter markings on the neckband with those on the neckline and pin them together at those 4 points. The seam in the neckband will align with the center back seam in the tank.

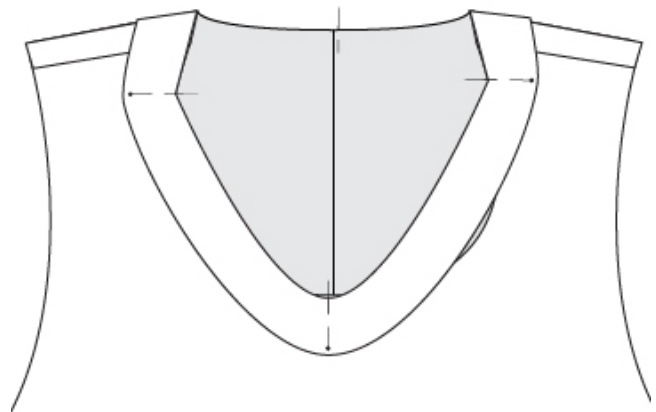


8. Serge the neckband to the shirt, starting on the back of the shirt. Carefully stretch the neckband to equal the length of the neckline as you sew between pins. When you reach a pin, stop, remove the pin, and adjust the stretch of the neckband so you can evenly sew to the next pin. When you get back to the point where you started, serge over the original serging line and then serge off the edge of the neckband.

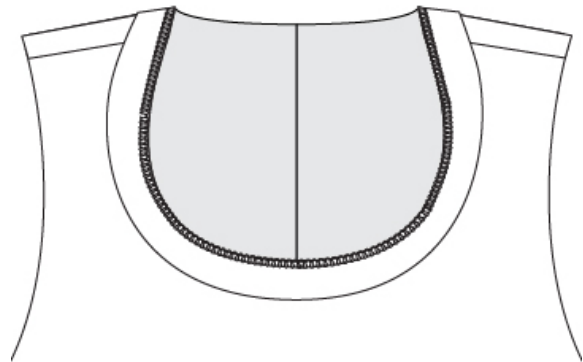


9. Flip the neckband up and press and steam very well. The serging should be pressed down toward the tank.

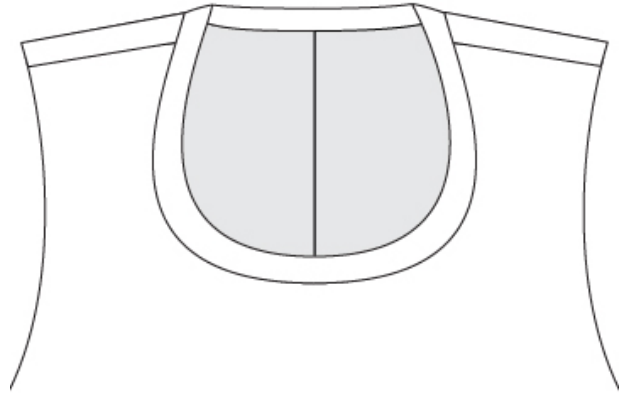


10. Serge one long edge of each arm binding.

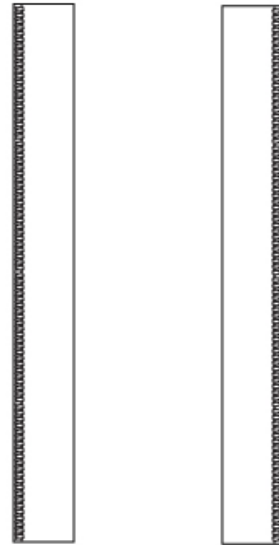


11. Pin the arm binding to the armscye of the tank, right sides together, with the non-serged edge of the binding aligning with the armscye. Keep the arm binding taut as you pin, just barely stretching it. Do not stretch the tank. There will be a tail of excess binding hanging free after pinning.

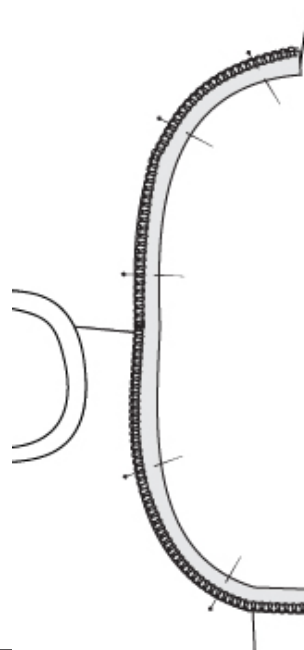


12. Serge the arm binding to the armscye without trimming any fabric off with the serger knife. Make sure the binding remains taut and slightly stretched. After sewing, trim the excess length of the arm binding that extends past the armscye.

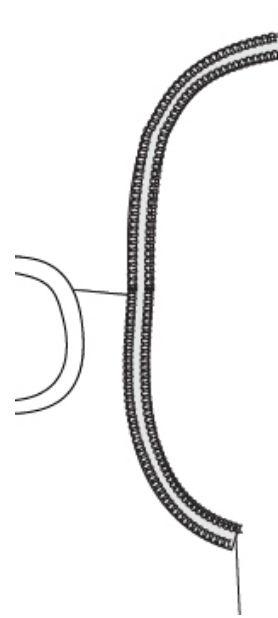

13. Flip the tank over so the wrong side is facing up. Bring the arm binding around to the wrong side. It should be wrapped around the serged stitches from step 12, but not folding them down. The serged edge from step 10 should cover the seam from step 12. Press very well.

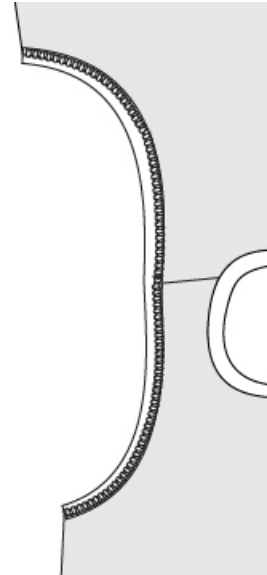

14. On the right side of the tank, pin the binding so the raw edge on the inside remains flat against the tank.

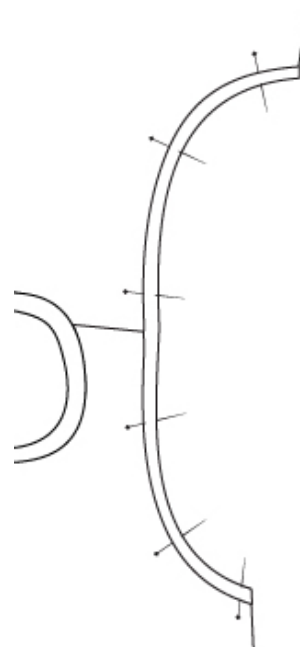


15. Top stitch the binding to the tank using a cover stitch machine, zig zag stitch, double needle, or two rows of stitching with lengthened stitches.


16. Sew the tank front and back right sides together along the side seams. Press the seam allowances toward the back. At the underarm, leave a long serger thread tail and use a wide-eyed needle to thread the tail back through the serging down the side seam. Alternately, use a sewing machine to sew over the serging stitches at the underarm for about 1/2" to lock them in place and clip the excess serger thread. If desired, top stitch down the side seam on the back of the tank for an inch or so below the underarm, catching the seam allowances underneath.

Tip: Baste a couple inches of the side seam together starting from the underarm point to keep the binding aligned when you sew.


17. Turn the hem up by 1/2 to the inside of the tank and press well. Pin in place and hem using a coverstitch machine, zig zag stitch, twin needle, or two rows of stitching with a longer stitch length.

Congrats, your Durango Tank is finished! Don't forget to share your project using #DurangoTank and #HeyJune Patterns!

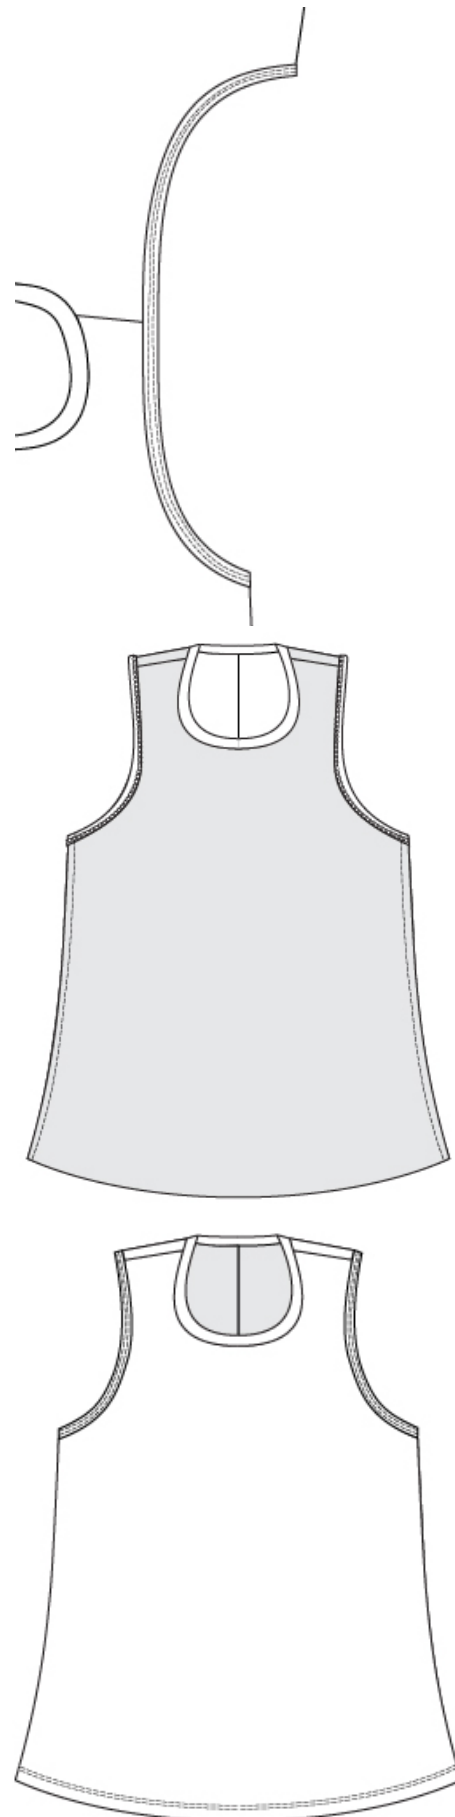




13

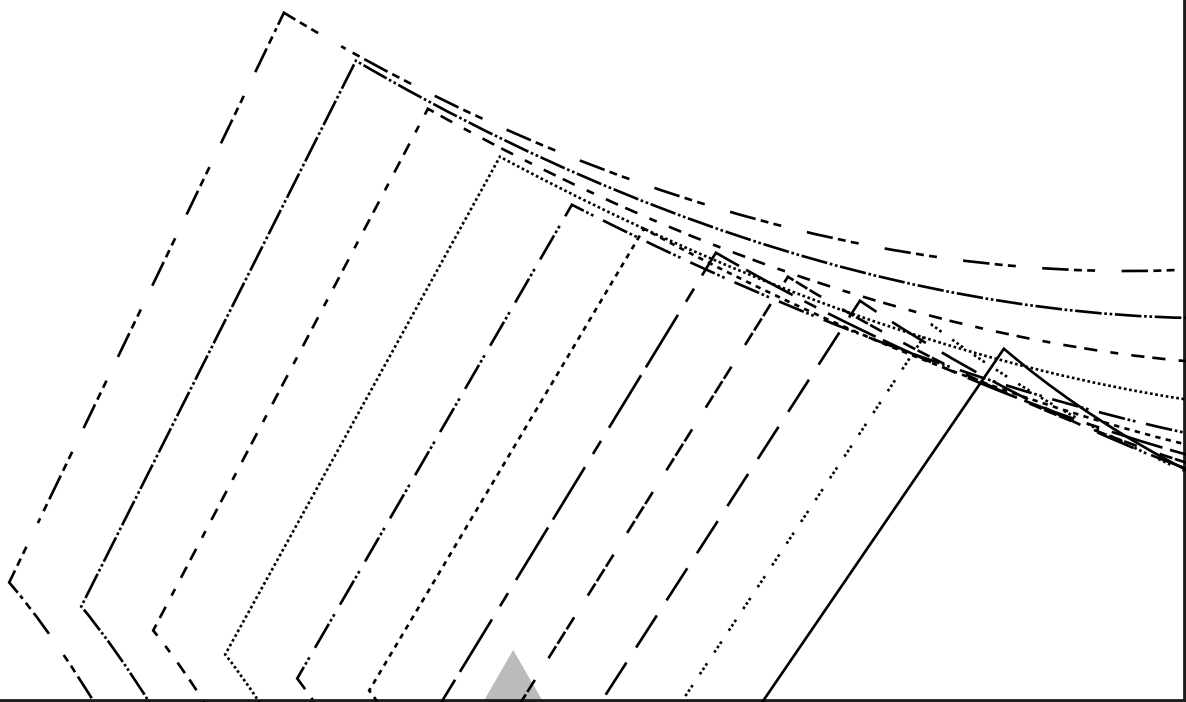

14

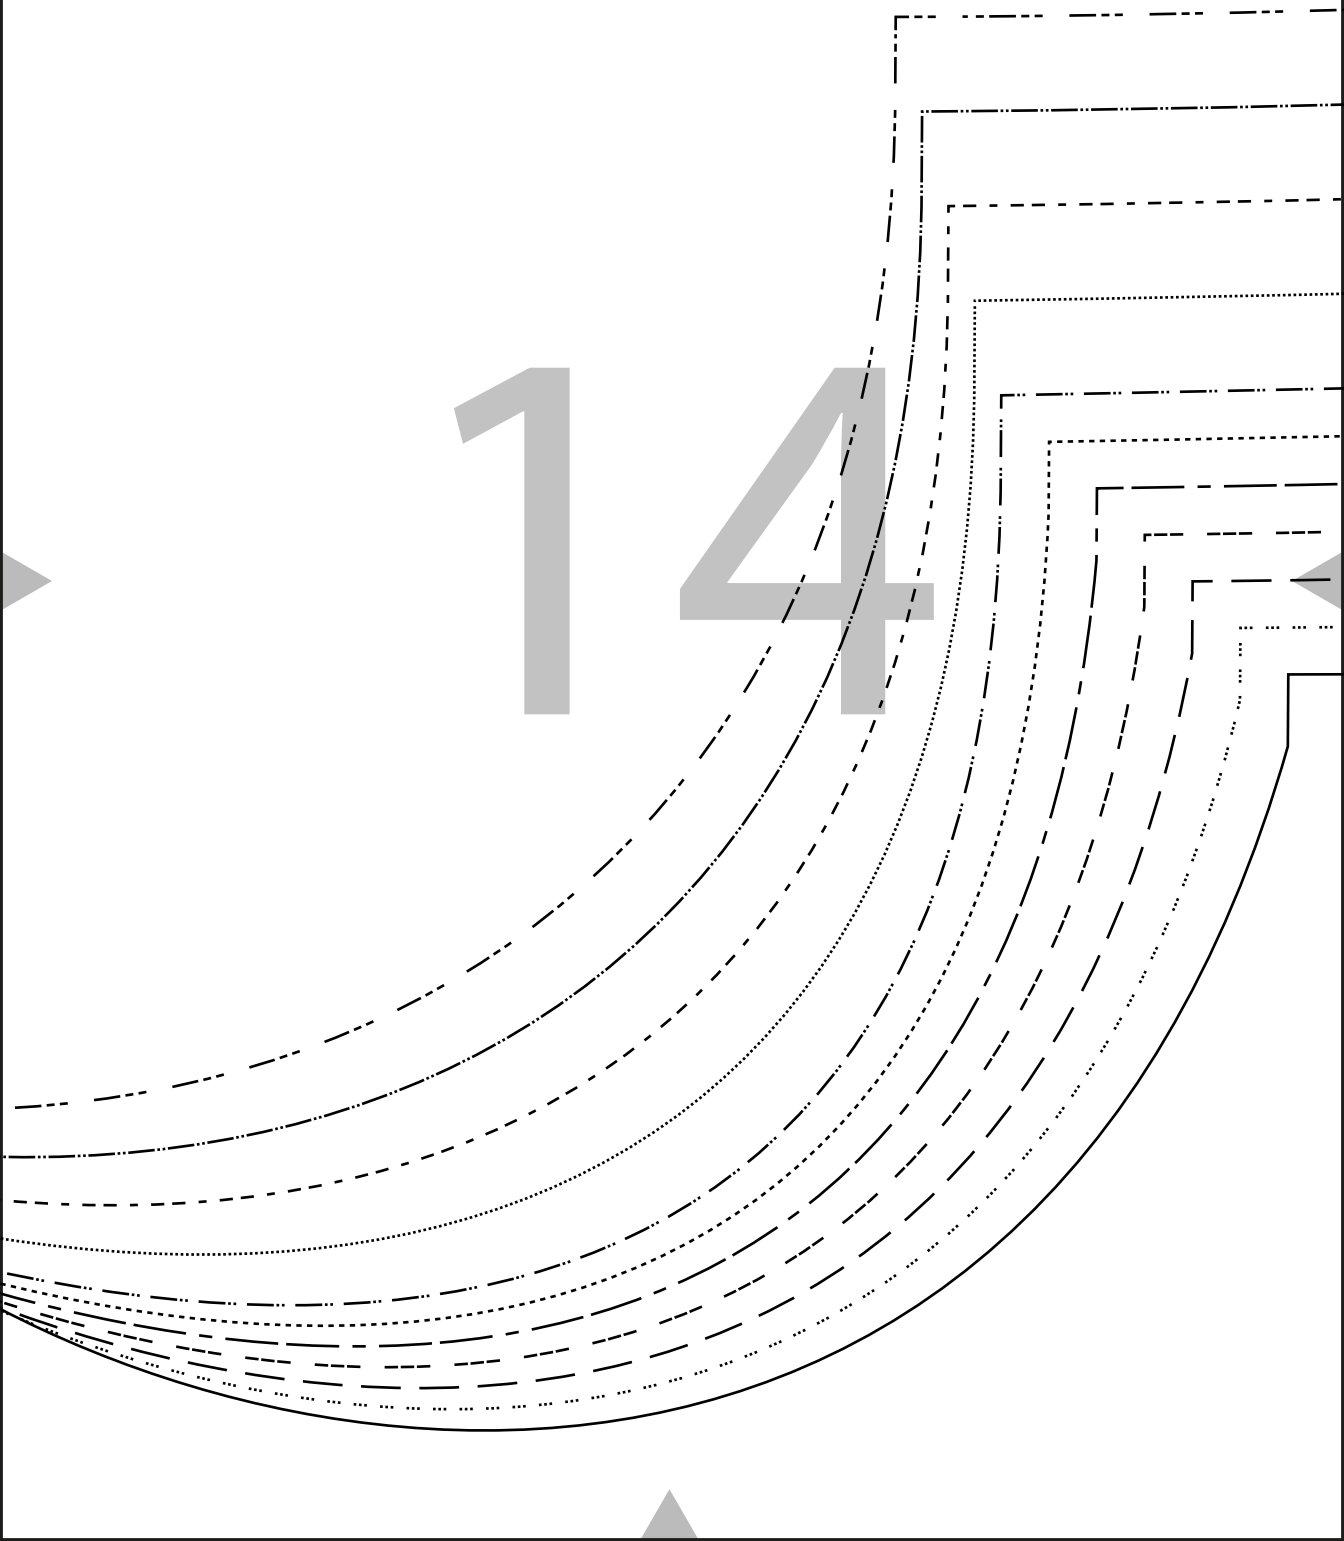

15



16


heyjune

DURANGO TANK

3


NECKBAND

cut 1

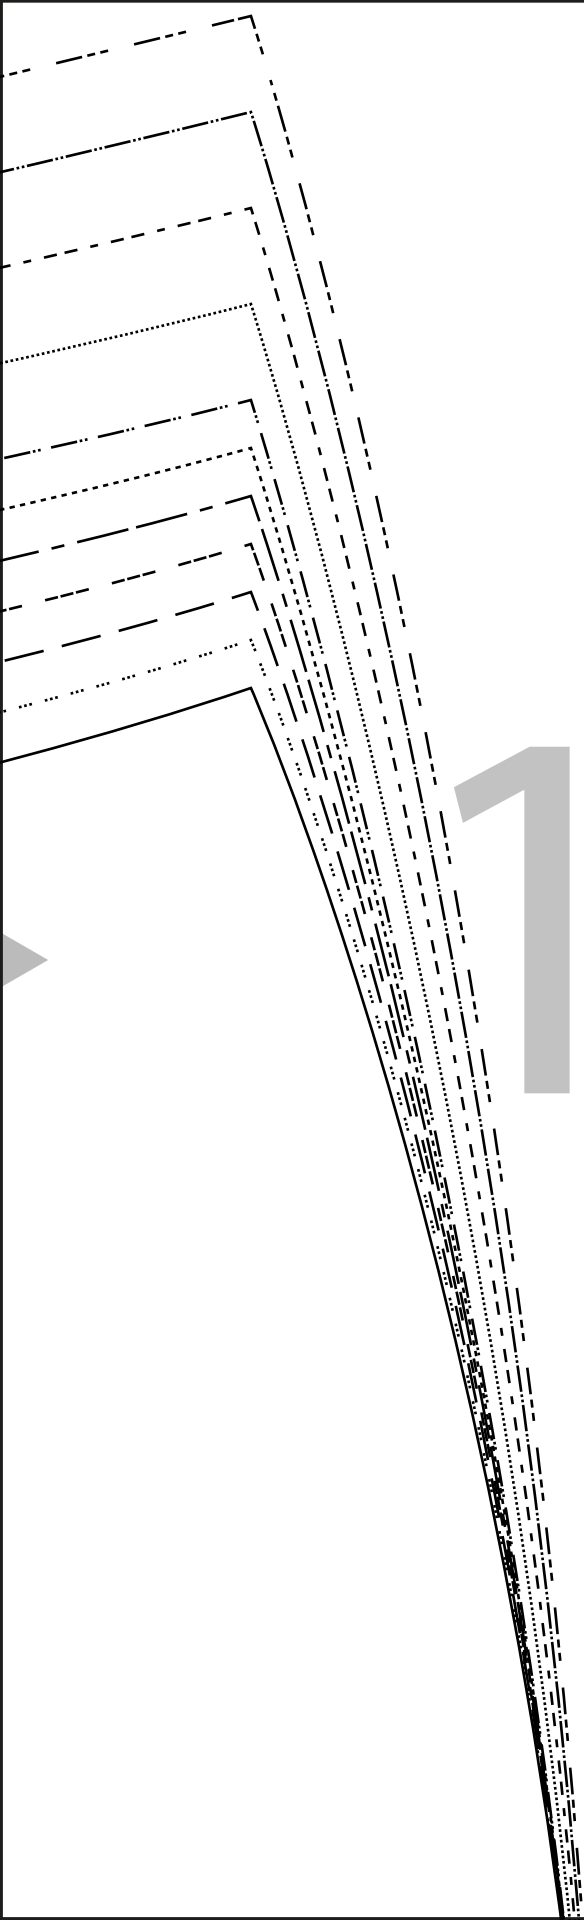

The background features a series of curved, parallel lines in the upper half, transitioning into a more complex pattern of intersecting lines and triangles in the lower half. The lines are in various styles: solid, dashed, and dotted. Small gray triangles are placed at the ends of some lines.


18

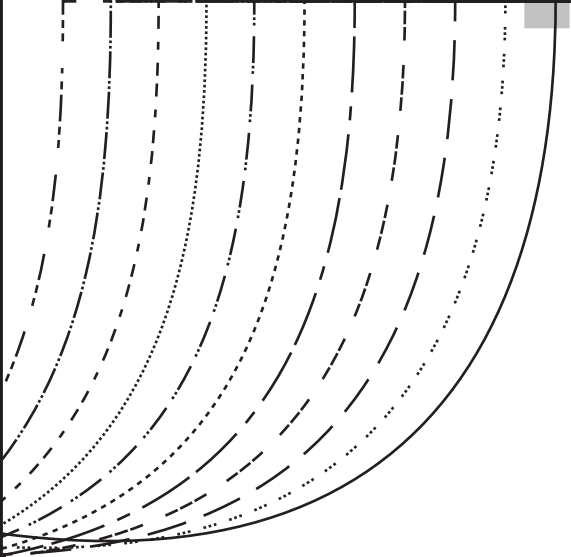

heyjune
DURANGO TANK

1

FRONT
cut 1
on fold

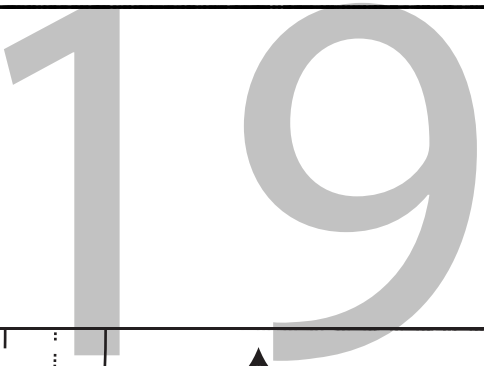

heyjune
DURANGO TANK

2

BACK
cut 2
(mirrored pair)

direction of greatest stretch




direction of greatest stretch




20

246810121416182022

21

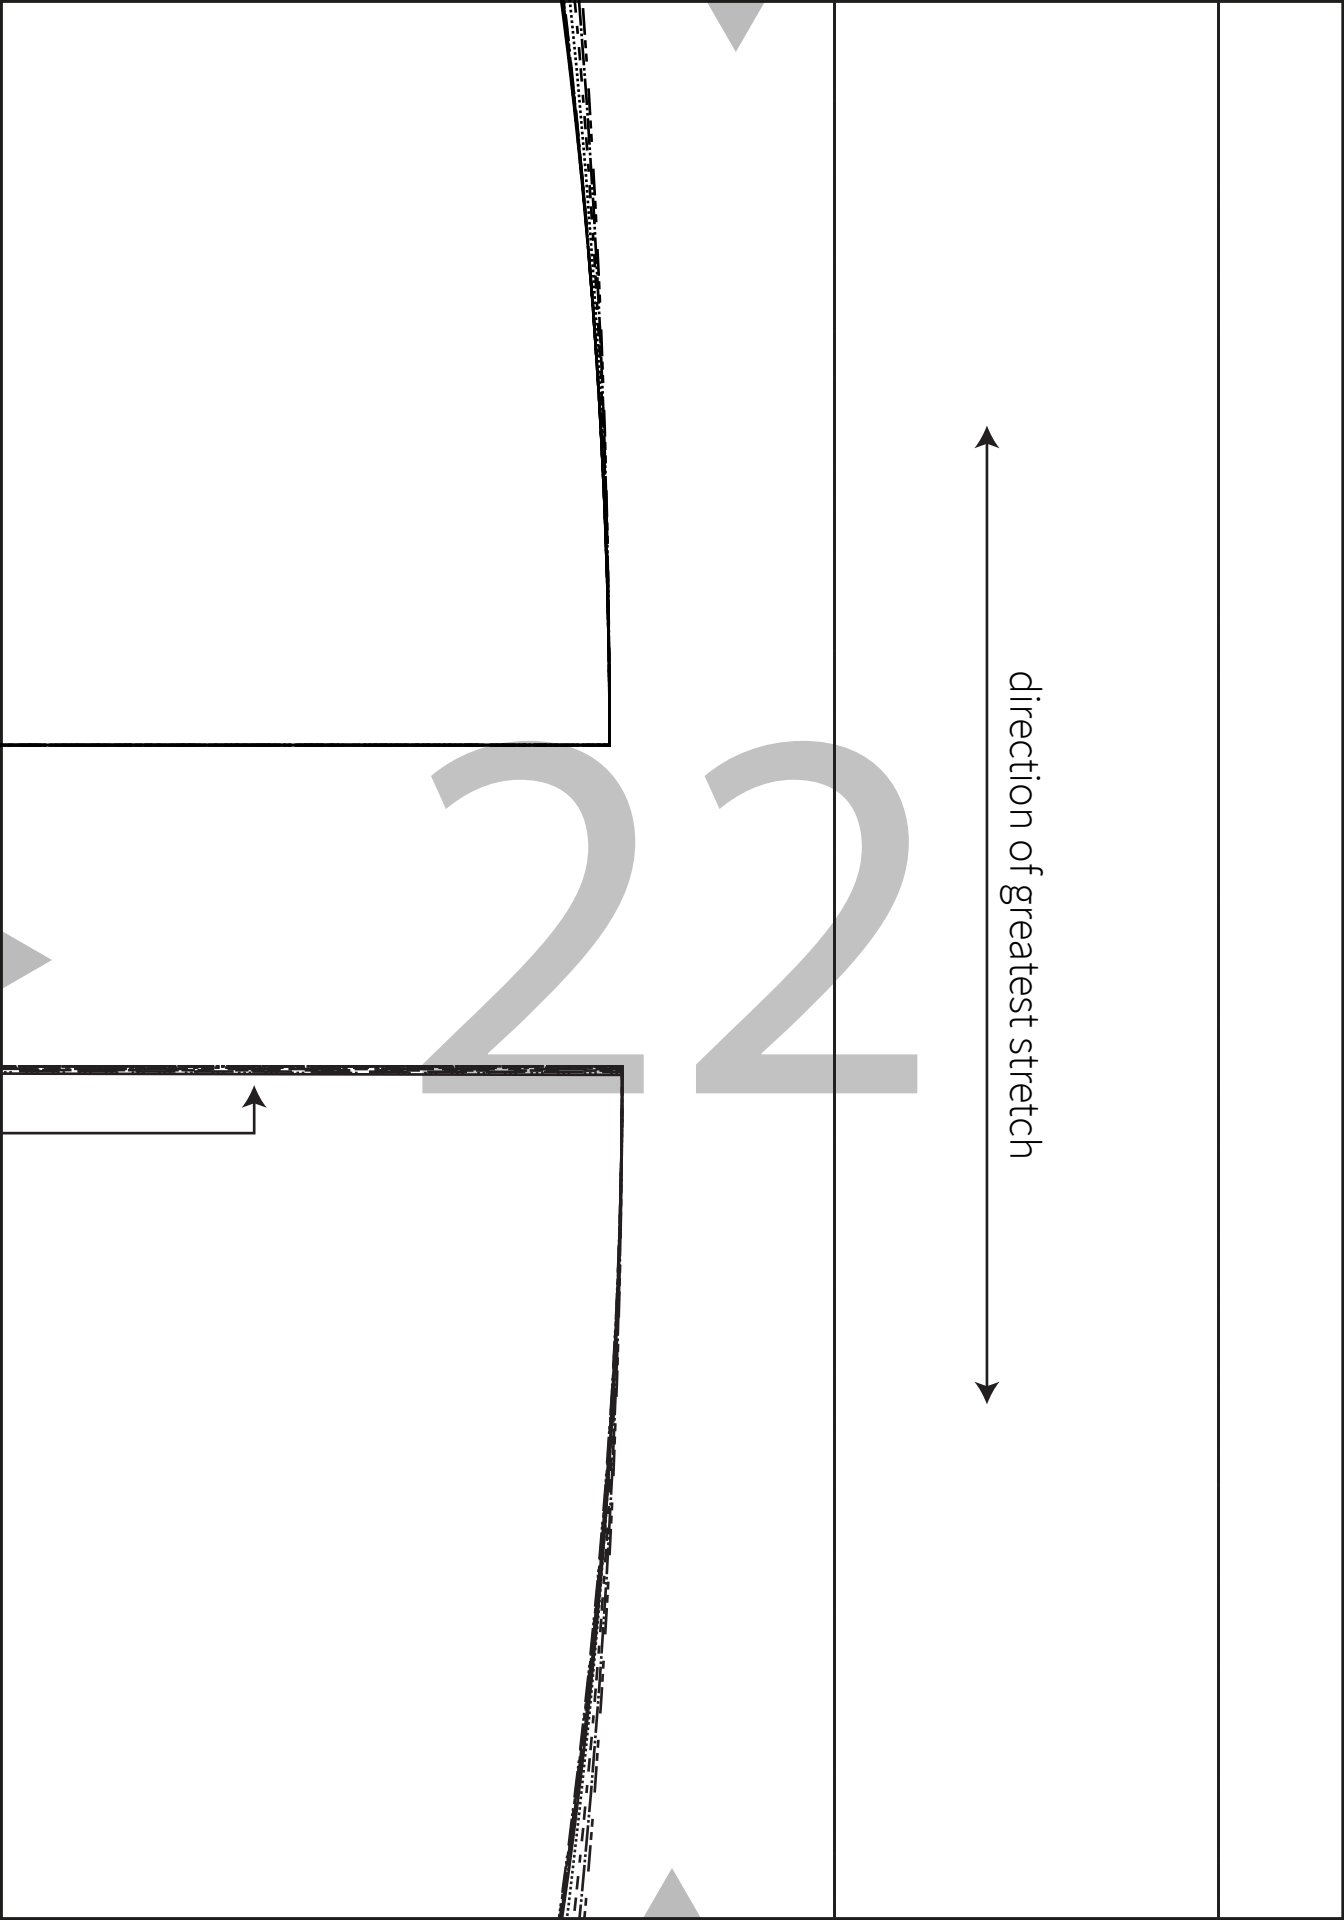

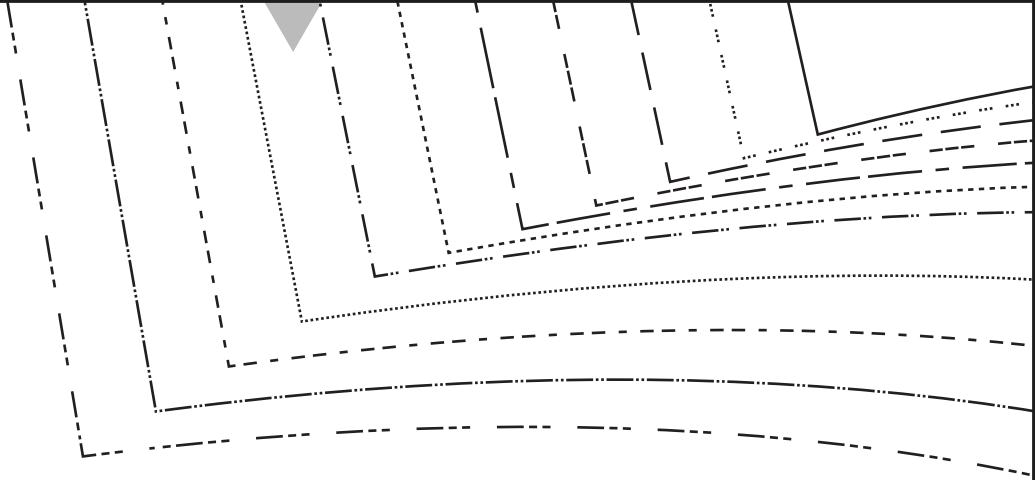

23




heyjune

DURANGO TANK

4

ARM BINDING
cut 2 on fold



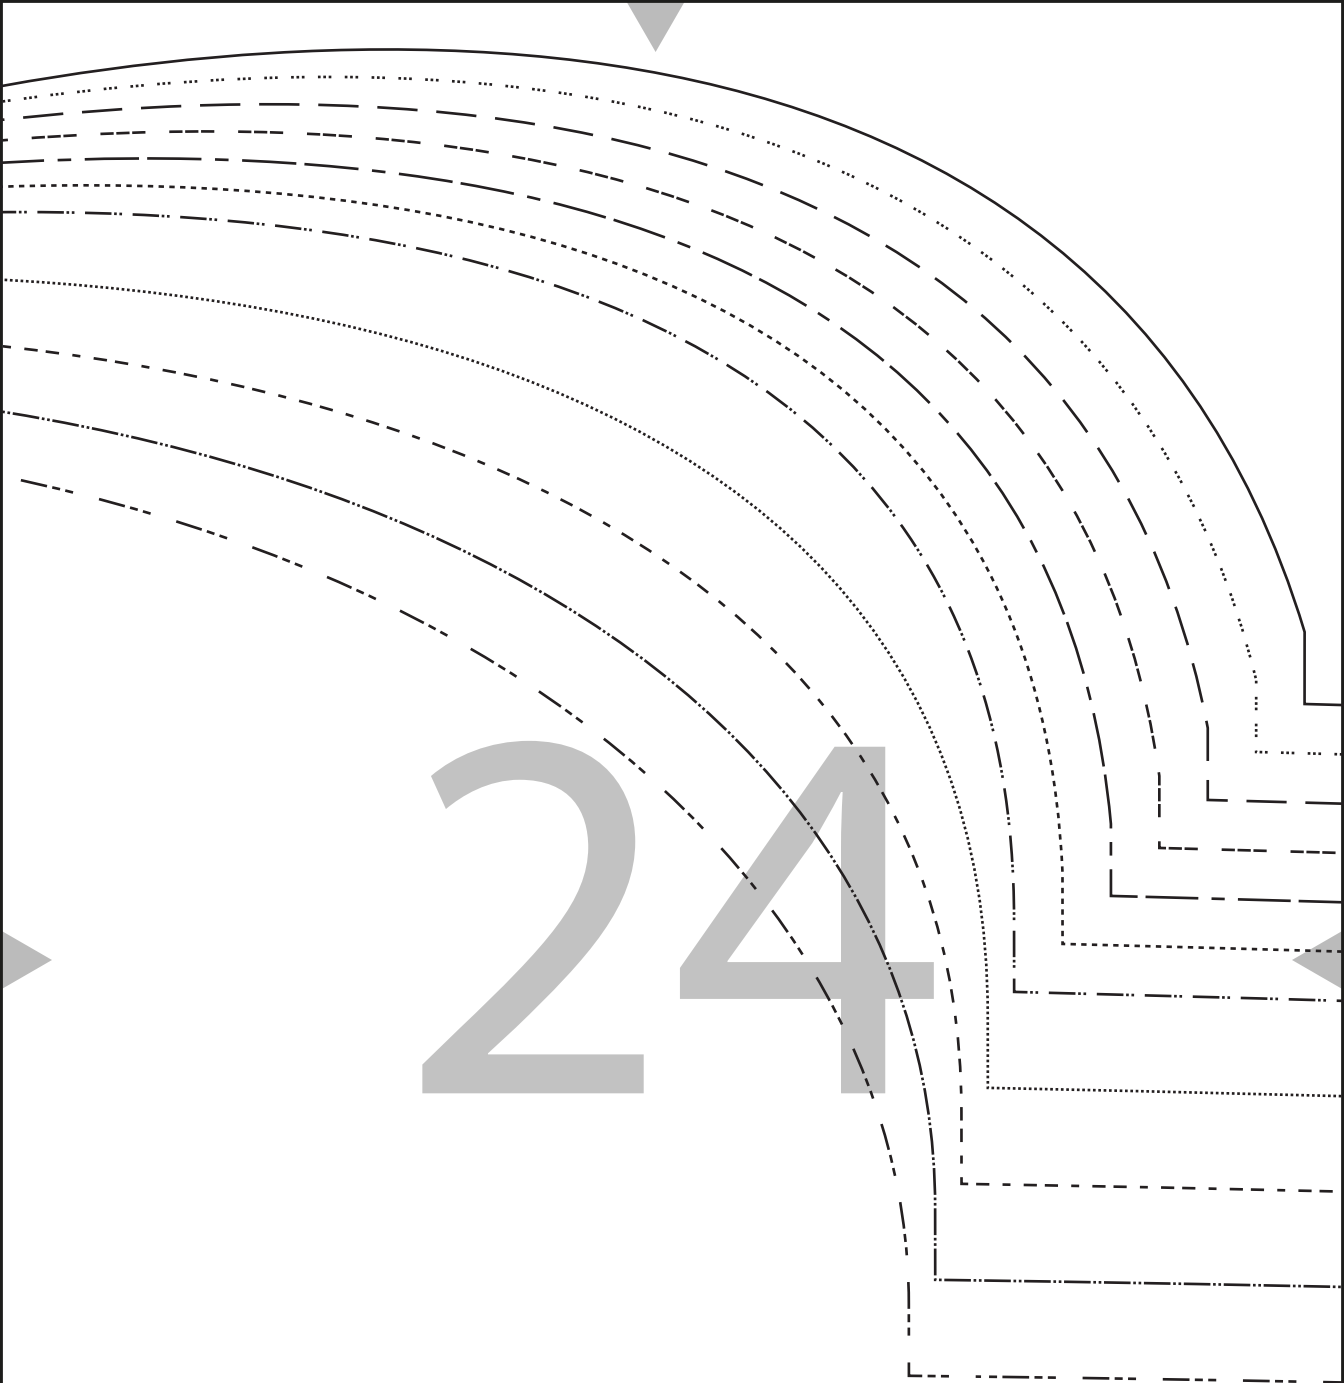

direction of greatest stretch

cut here for
sizes 2 - 14

cut here for
sizes 16 - 22



25

26

